




# SoHo Elavate 1680

## SOLAR FABRIC (3%)

### AVAILABLE COLOURS

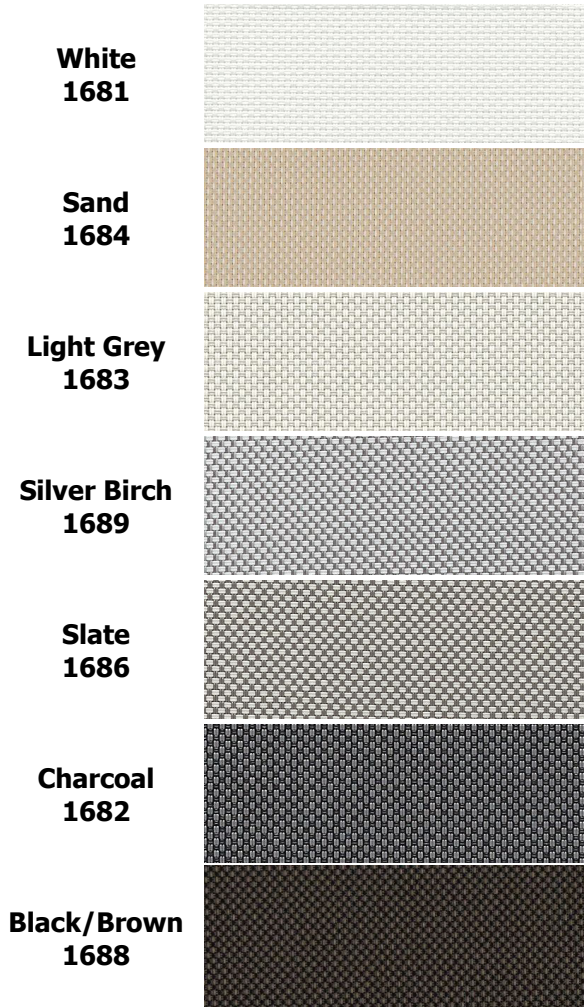

### FABRIC SPECIFICATIONS

<b>Stock Widths:</b>	<b>126"</b>
<b>Openness:</b>	<b>3 %</b>
<b>Composition:</b>	<b>24% Polyester 76% PVC</b>
<b>Thickness:</b>	<b>.022"</b>
<b>Weight:</b>	<b>13.57 oz/yd<sup>2</sup></b>
<b>Fire Rating:</b>	<b>NFPA 701 CAN/ULC-S109</b>
<b>Cleaning Info:</b>	<b>Contact Manufacturer</b>
<b>Spline:</b>	<b>SnapLoc</b>
<b>Railroading:</b>	<b>Yes</b>
<b>Bacteria/Fungal Resistance</b>	<b>ASTM G21 / ASTM E2180</b>
<b>Acoustic Performance</b>	<b>0.30 NRC / 0.31 SAA</b>



Powered by PROTX2®, SoHo Elavate shade cloth provides an additional layer of performance with patent-pending, medical-grade, metal-free technology.

This collection features thin, finely woven yarns in a 2 x 2 basket weave pattern with a soft hand and smooth texture to create elegant solutions for any project.

If you require additional fabric samples please E-mail: [samples@frasershading.com](mailto:samples@frasershading.com)

Actual fabric colours may vary from pictures | Fabric stock levels may vary

Openness factors are approximate | Mockups are recommended

Specification subject to change without notice | ©Fraser Shading Systems 2024



# SoHo Elavate™ Shade Cloth Properties

## 3% open 1680 series

#	Name	Fabric Content	Solar Optical Properties				Single Shading Coefficient			Insulating Shading Coefficient		
			Ts	Rs	As	Tv	1/8CL	1/4CL	1/4HA	1/2CL	1CL	1HA
1681	White	76% PVC / 24% Polyester	21	70	9	17	0.31	0.32	0.31	0.30	0.30	0.24
1684	Sand	76% PVC / 24% Polyester	12	52	36	7	0.42	0.42	0.36	0.40	0.39	0.29
1683	Light Grey	76% PVC / 24% Polyester	15	50	35	10	0.45	0.44	0.37	0.42	0.40	0.30
1689	Silver Birch	76% PVC / 24% Polyester	7	41	53	4	0.49	0.48	0.39	0.47	0.44	0.32
1686	Slate	76% PVC / 24% Polyester	5	30	65	3	0.56	0.54	0.42	0.53	0.49	0.35
1682	Charcoal	76% PVC / 24% Polyester	3	9	87	3	0.70	0.66	0.49	0.66	0.60	0.41
1688	Black Brown	76% PVC / 24% Polyester	2	6	92	2	0.72	0.68	0.50	0.68	0.61	0.42

The solar optical properties are used to calculate the shading coefficient. The shading coefficient represents the percentage of solar heat gain that is transmitted to the interior through the glass and shading system.

**Ts** = Solar Transmittance  
**Rs** = Solar Reflectance  
**As** = Solar Absorptance  
**Tv** = Visual Transmittance

**1/8CL** = 1/8" Clear Glass  
**1/4CL** = 1/4" Clear Glass  
**1/4HA** = 1/4" Heat Absorbing Glass

**1/2CL** = 1/2" Insulating Clear Glass  
**1CL** = 1" Insulating Clear Glass  
**1HA** = 1" Insulating Heat Absorbing Glass

### Acoustic Performance

0.30 NRC, 0.31SAA

### Mesh Weight

13.57 oz/yd<sup>2</sup>

### Fabric Thickness

0.022 in

# CERTIFICATE OF COMPLIANCE



**Mecho**  
**SoHo Elavate**  
**I 680 Series**  
**Average Openness: 3%**

239651-420  
Certificate Number  
07/29/2019 - 12/03/2023  
Certificate Period  
Certified  
Status

UL 2818 - 2022 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Window treatments are determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.2-2017 using an Office and Classroom Environment. Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

## GREENGUARD Gold Certification Criteria for Building Products and Interior Finishes

Criteria	CAS Number	Maximum Allowable Predicted Concentration	Units
TVOC (A)	-	0.22	mg/m <sup>3</sup>
Formaldehyde	50-00-0	9 (7.3 ppb)	µg/m <sup>3</sup>
Total Aldehydes (B)	-	0.043	ppm
4-Phenylcyclohexene	4994-16-5	6.5	µg/m <sup>3</sup>
Particle Matter less than 10 µm (C)	-	20	µg/m <sup>3</sup>
1-Methyl-2-pyrrolidinone (D)	872-50-4	160	µg/m <sup>3</sup>
Individual VOCs (E)	-	1/2 CREL or 1/100th TLV	-

- (A) Defined to be the total response of measured VOCs falling within the C6 – C16 range, with responses calibrated to a toluene surrogate. Maximum allowable predicted TVOC concentrations for GREENGUARD Gold (0.22 mg/m<sup>3</sup>) fall in the range of 0.5 mg/m<sup>3</sup> or less, as specified in CDPH Standard Method v1.2.
- (B) The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.
- (C) Particle emission requirement only applicable to HVAC Duct Products with exposed surface area in air streams (a forced air test with specific test method) and for wood finishing (sanding) systems.
- (D) Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day
- (E) Allowable levels for chemicals not listed are derived from the lower of 1/2 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.2 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



FRASER SHADING SYSTEMS | Unit 101 – 5219 192<sup>nd</sup> Street | Surrey, BC, Canada V3S 4P6

Off: 604-881-4881 | Fax: 604-881-4882 | [www.frasershading.com](http://www.frasershading.com) | [www.instagram.com/fraser\\_shading\\_systems](https://www.instagram.com/fraser_shading_systems)